

AnoQuick™

AnoQuick's sturdy yet lightweight profile is ideal for larger installations. This aluminum holder is perfect for thicker substrates such as foamboard.

An elegant solution for thick and thin substrates

- Durable, lightweight aluminum
- Sturdy enough for permanent or semi-permanent installation
- Eliminates bowing
- Works with thicker substrates up to 3/16" thick
- Includes two end caps
- Elegant, upscale appearance



12A300R
black anodized aluminum
round profile

12A300R
clear anodized aluminum
round profile

12A300SQ
black anodized aluminum
square profile

12A300SQ
clear anodized aluminum
square profile

The AnoQuick works with both thin and thick substrates up to 3/16" thick.




12A300 Accessories


Suction cups are not recommended for use with heavier AnoQuick installations. Call for recommendations.




1UP-0101
NEW MultiClip
Black, white or clear




06-5050
Cable clip
Black, white or clear



20-0038
Window mounts
Clear with black, white
or clear cap




06-SC150H
Suction cup with hook
Clear with plated
steel hook



06-6067
Wall mounting hanger
Galvanized steel



06-6068
Slatwall hanger
Galvanized steel

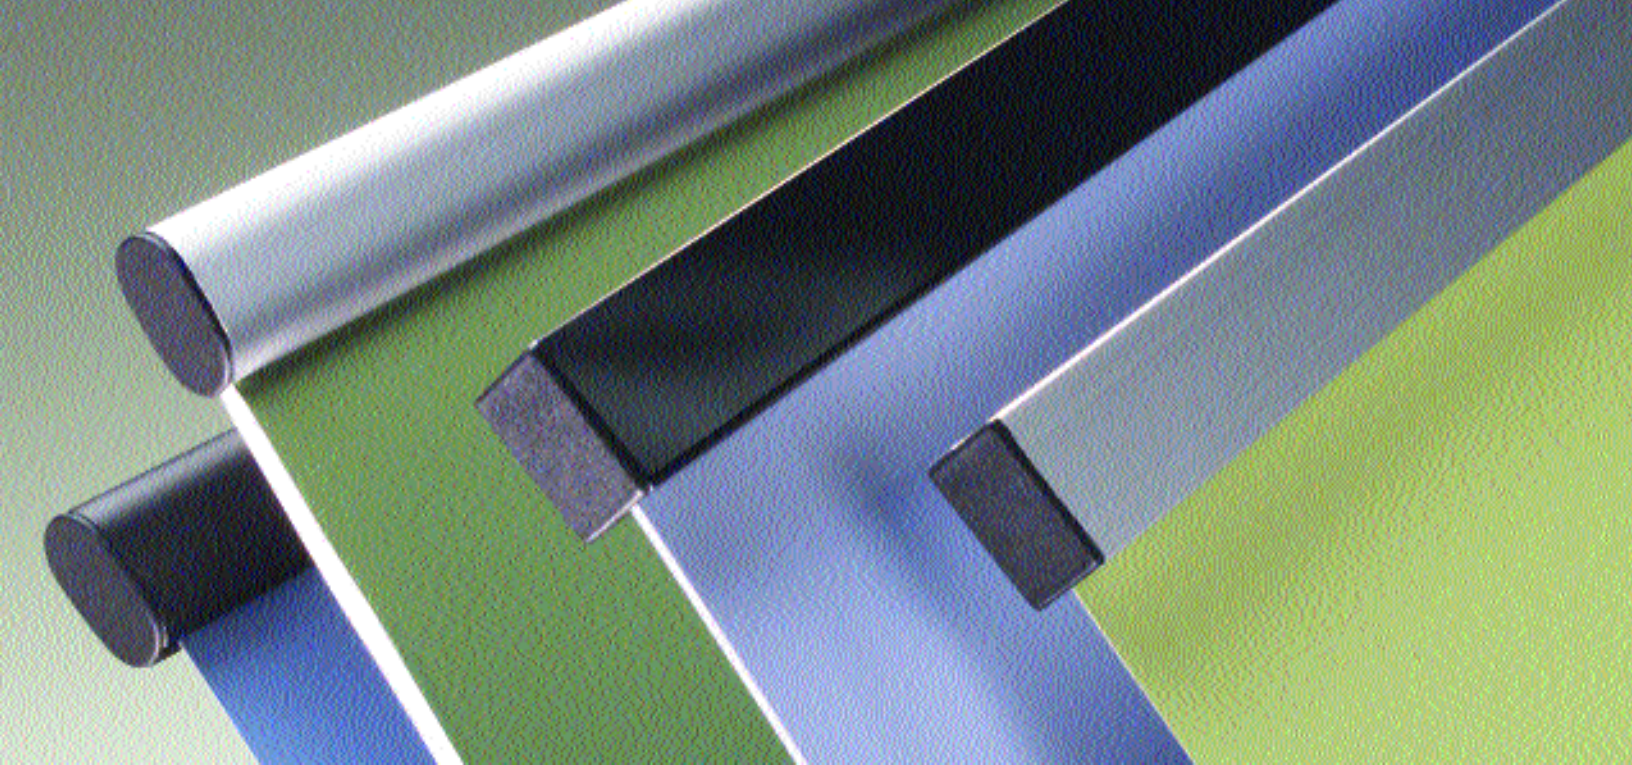

AnoQuick Pricing

Graphic Size

12A300


Price

Profiles

Shown actual size

12"	←	→	20"
21"	←	→	30"
31"	←	→	40"
41"	←	→	50"
51"	←	→	60"
61"	←	→	80"
81"	←	→	97"
110"			
121"			

All AnoQuick orders are custom cut to your exact specifications. For other sizes, call for pricing.



End caps (Replacements)

06-5525

06-5545



Black or white



Black


2 black end caps are included with each holder.

Substrate Possibilities

inches millimeters points

These thicknesses require the use of AnoQuick Pegs.

1/16"	1 1/2 mm.	60 pt.	
3/32"	2 mm.	80 pt.	
1/8"	3 mm.	125 pt.	
3/16"	5 mm.	188 pt.	



06-1920
AnoQuick™ Peg
White plastic

Approximate thickness



AnoConnectors are used to connect AnodoQuick to make longer length holders. AnoConnector is not compatible with applications using AnoQuick Peg.

06-2930
AnoConnector™
Galvanized steel

AnoQuick works with EconoStand
shown in anodized aluminum with black details



Technical Information

AnoQuick presses easily onto foamboard edges where total thickness of board, image and protective laminate is equal to 3/16".

For rigid substrates like Sintra®, use the AnoQuick Peg for maximum security.

Stock finishes are black anodized or clear anodized aluminum. Custom colors also available; 3,000ft. minimum and an up charge may apply. Call for pricing.