

SuperSnap™

With its substantial profile, SuperSnap gives your graphics a bold, clean finish. Its durable construction is ideal for holding wider graphics without any bowing or curling. Best of all, graphics change in seconds with its snap-open, snap-closed hinge.

A bigger bolder holder for your larger displays

- Solid profile for a bolder look
- Ideal for wider graphics
- No scoring or graphic preparation required
- Includes 2 matching end caps per holder
- Durable and reusable



Open the SuperSnap, insert your graphic and snap it closed.



12S300
black


12S300
white

12S300
clear

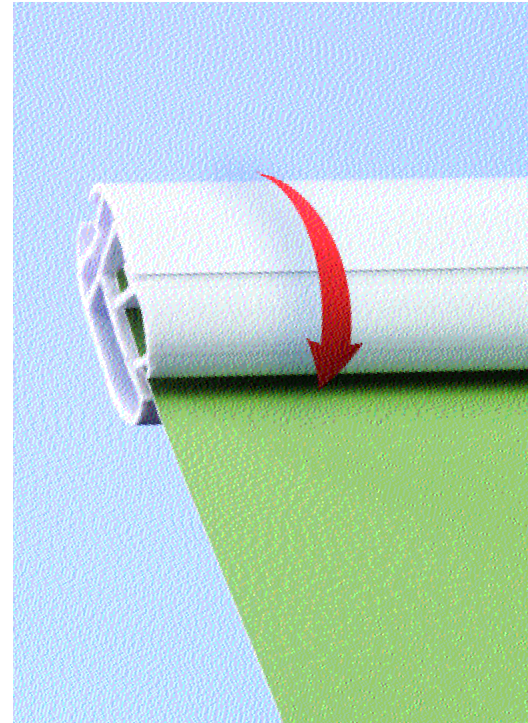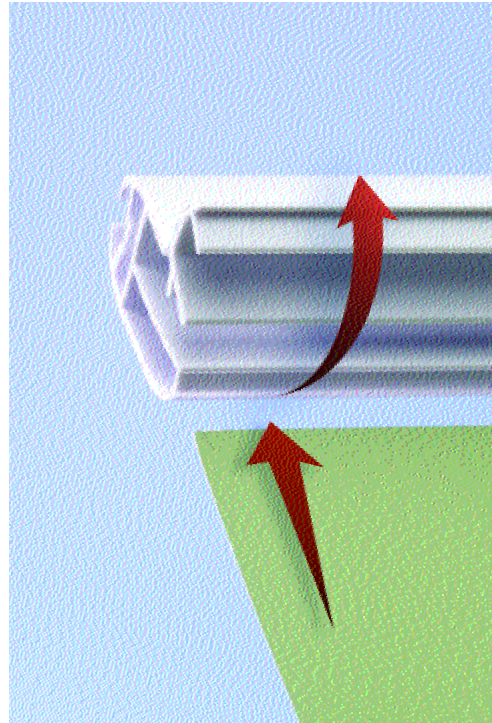

12S300 Accessories

Suction cups are not recommended for use with heavier SuperSnap installations. Call for recommendations.



1UP-0101
NEW MultiClip
Black, white or clear




06-5050
Cable clip
Black, white or clear




20-0038
Window mounts
Clear with black, white or clear cap




06-SC150H
Suction cup with hook
Clear with plated steel hook



06-6067S
Wall mounting hanger
Galvanized steel



06-6068S
Slatwall hanger
Galvanized steel

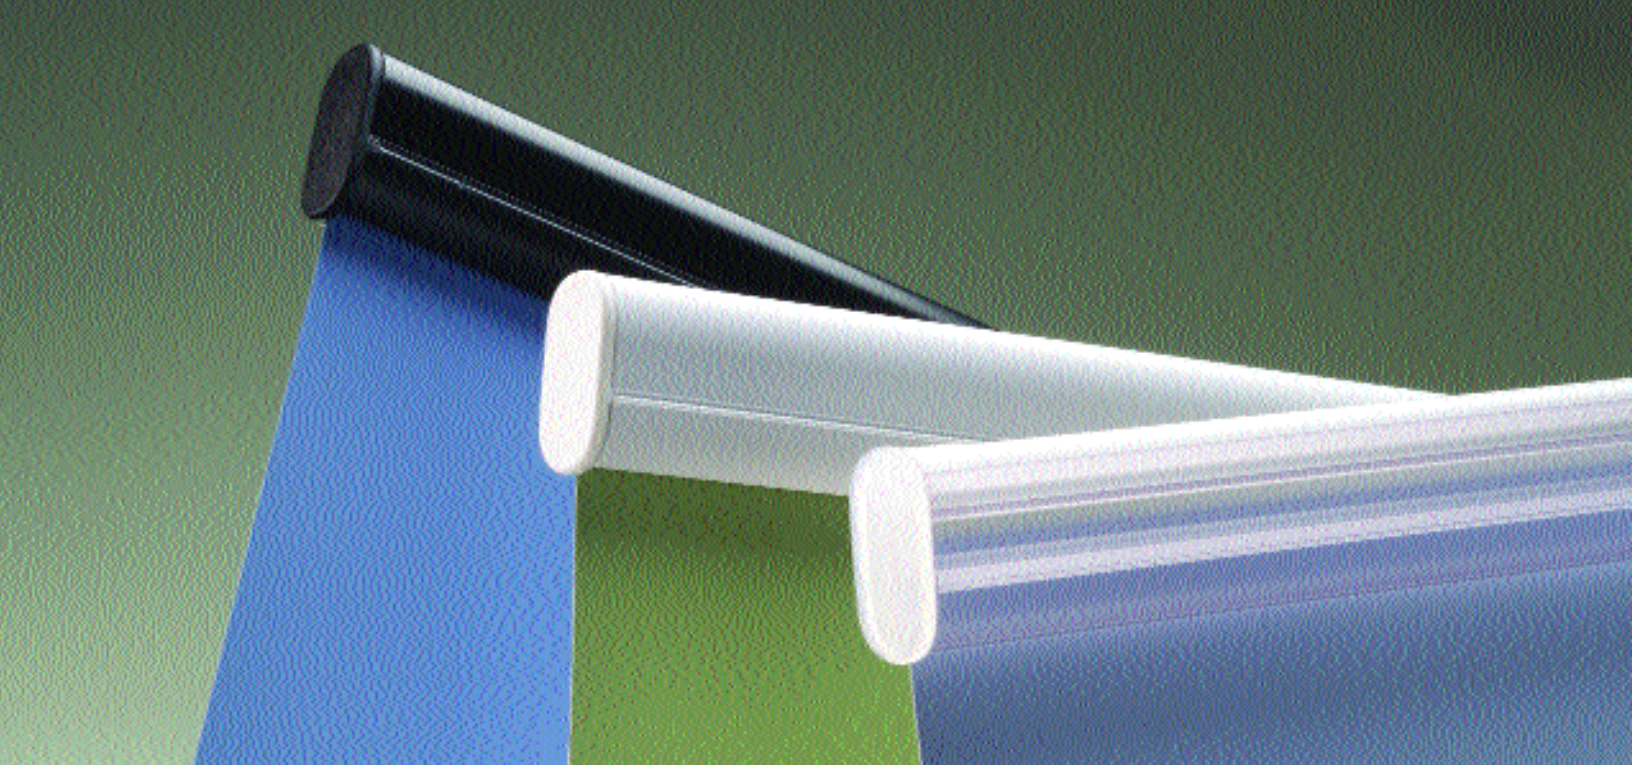


SuperSnap Pricing

Graphic Size	12S300	Price
	12" \longleftrightarrow 20"	
	21" \longleftrightarrow 30"	
	31" \longleftrightarrow 40"	
	41" \longleftrightarrow 50"	
	51" \longleftrightarrow 60"	
	61" \longleftrightarrow 80"	
	81" \longleftrightarrow 97"	
	110"	
	121"	

All SuperSnap orders are custom cut to your exact specifications. For other sizes, call for pricing.

End caps



06-5475
Replacement end caps
Black, white or clear

2 matching end caps are included with each holder.

Profile Shown actual size



Substrate Possibilities

inches	millimeters	points	everyday object
1/1000"	1/40 mm.	1 pt.	plastic grocery bag
1/100"	1/4 mm.	10 pt.	business cards
1/50"	1/2 mm.	20 pt.	2 business cards
1/32"	1 mm.	30 pt.	credit card
1/16"	1 1/2 mm.	60 pt.	penny

Approximate thickness equivalents

Technical Information

SuperSnap is best used with plastic substrates such as Styrene and Sintra in the recommended thickness range. It is highly recommended that any application for cardstock be tested. Black SuperSnap is not recommended for areas receiving direct sunlight.

Stock colors are black, white or clear plastic. Custom colors also available; 10,000ft. minimum and an up charge may apply. Call for pricing.



97-0304-06
Threaded Rod
(non-permanent)
Galvanized steel



06-2930
AnoConnector™
(permanent)
Galvanized steel

AnoConnectors and Threaded Rods are used to connect SuperSnap to make longer length holders. Threaded Rod is for non-permanent installation. Use both AnoConnector and Threaded Rod for permanent installation.

SuperSnap works with EconoStand
shown in anodized aluminum with black details

